


G18

产品安装手册

INSTALLATION MANUAL

Version 1.0cn

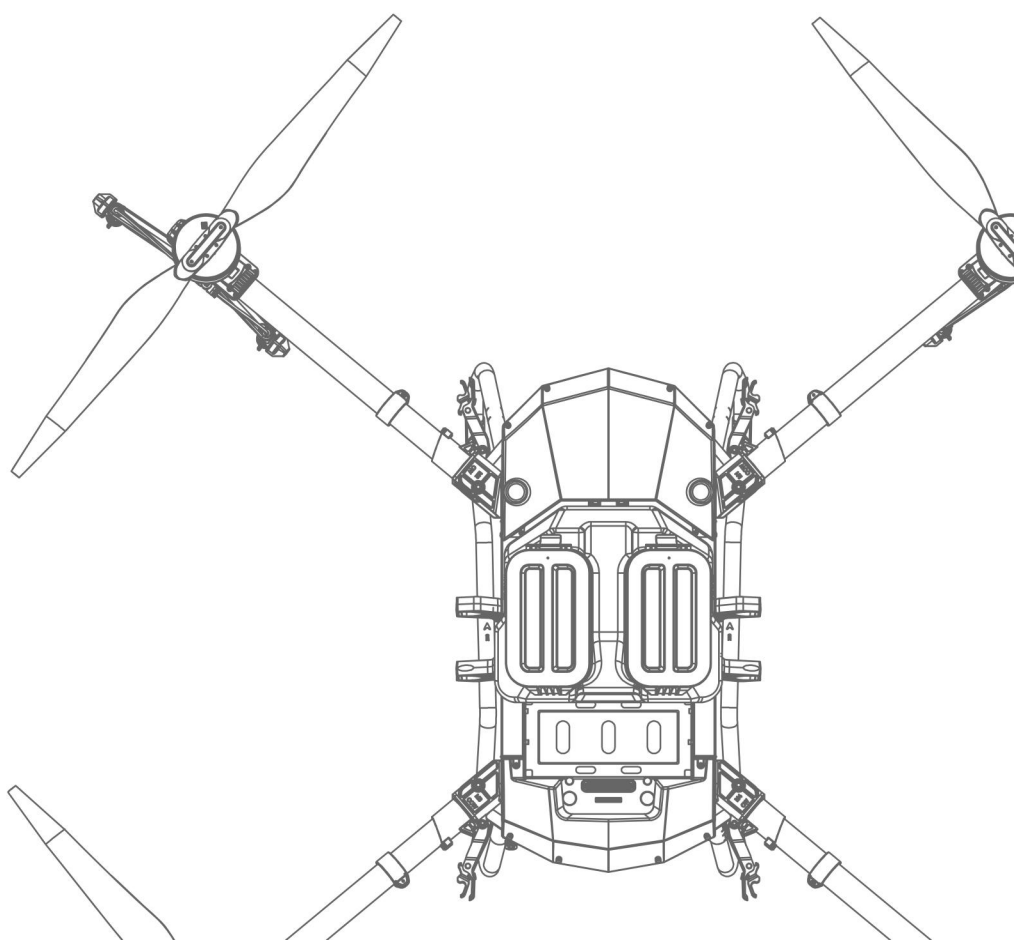

Revision	Version	Author	Description	Date
1	V1.0		First Edition	May 2025

CONTENT

Chapter 1: Usage Instructions	1
1.1 Document Information	1
1.2 Disclaimer	1
Chapter 2 Product Overview	2
2.1 Product Introduction	2
2.2 Parameters	3
Chapter 3 Installation	4
3.1 Drone Installation	4
3.2 Spraying System Installation	17
3.3 Control System Installation	21
Chapter 4 Drone Debugging	23
4.1 Drone Debugging	23
4.2 Flight Test	31

Chapter 1: Usage Instructions

1.1 Document Information

The G18 is a 20L lightweight quadcopter frame from EFT. It is not a complete drone and is not ready to fly. To facilitate customers to use this product, this document provides detailed installation and debugging instructions. The spraying system, motor system, control system, and power supply configurations mentioned in this document are provided for reference only and are not included in EFT standard set. Users may configure these components according to their own needs, and there is no mandatory configuration requirement.

While we have made every effort to ensure the accuracy of this document, errors may still exist. If you find any mistakes or have suggestions for improvement, please contact EFT technical support team.

For more information, please visit the official EFT website www.effort-tech.com

1.2 Disclaimer

Due to the particular nature of drone frame products, please read this document carefully before use. By using this product, you are deemed to have thoroughly read, understood, acknowledged, and accepted all terms and content of this document.

This product is not a toy and carries certain safety risks during use. It is not suitable for individuals under the age of 18, or those legally defined as having limited or no civil capacity, or individuals with physical disabilities affecting safe operation. Keep this product out of the reach of children. Be especially cautious when operating the product in environments where children are present.

Any product may be subject to accidents due to improper operation or environmental factors. You fully understand and agree to bear all risks and losses caused by such accidents. EFT shall not be held liable for any such incidents.

Do not disassemble, modify, add to, or use this product beyond its original intended purpose without authorization. Faults, crashes, or other incidents caused by improper storage, incorrect assembly, settings, operations, unauthorized modifications or add-ons, or third-party components will not be covered under warranty or maintenance services. The user shall bear all related economic and legal responsibilities.

In all cases, purchasers and users must comply with the applicable laws and regulations, user instructions, and safety requirements of the country or region where the product is used. EFT assumes no responsibility for any consequences arising from violations of such laws or regulations.

EFT reserves the right to update and make the final interpretation of this manual. Without prior notice, EFT may update, revise, or remove product information—including that on its official website, social media, and

e-commerce platforms—as well as content in the User Manual, Assembly Manual, software, and firmware.

Chapter 2 Product Overview

2.1 Product Introduction


The G18 agricultural drone frame continues the classic foldable design for easier transport and storage. It is integral Die-forged truss frame , providing enhanced durability and impact resistance. Doubled strength ensures stable and flexible flight under heavy loads. Equipped with dual-lock buckles, it enhances safety during farming operations.Two optional battery plugs allow for various battery installation. The front and rear power distribution boards, combined with an extra-large flight controller bay, allow compatibility with various flight controllers and receiver devices.

The spraying system features a modular design that supports single or dual pump installation. Optional pressure nozzles or centrifugal nozzles, enabling efficient spraying across diverse farming scenarios.



NO.	NAME	NO.	NAME
①	Front Upper Cover	⑥	Rear Upper Cover
②	Motor Set	⑦	Smart Battery
③	Landing Gear	⑧	Drone Arms
④	Pressure Nozzle	⑨	Landing Gear Crossbar
⑤	Spraying Tank	⑩	Water Pump

2.2 Parameters

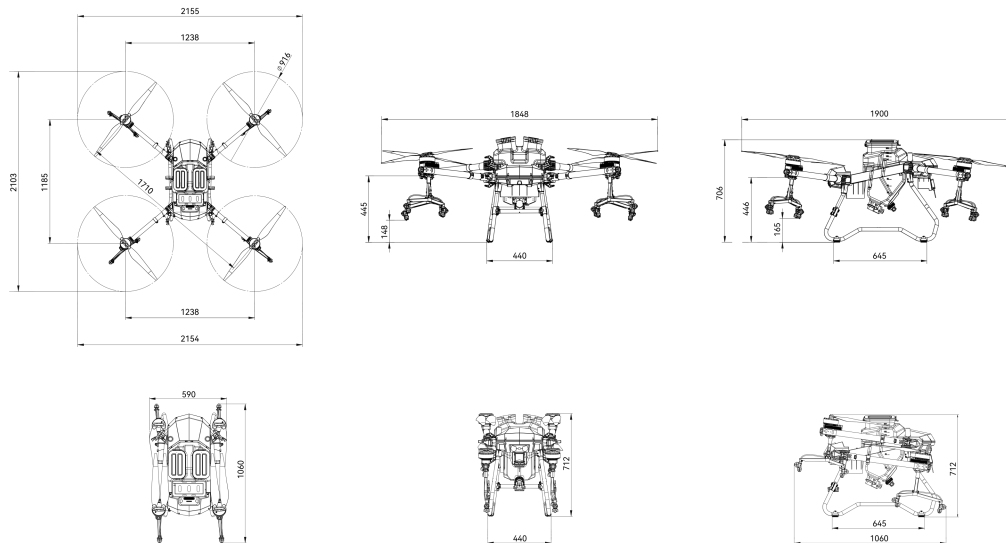

Parameters	Configuration
Wheelbase	1710mm
Frame Weight	8.75kg
Unfolded Size (with propeller)	1848*1900*706mm
Folded Size	590*1060*712mm
Tank Capacity	20L
Tank Weight	2.12kg
Color	Orange
Recommended Motor	X9 PLUS
Recommended Battery	22000mAh (14S)
Battery Compartment Size	259*125*190mm
Arm Diameter	Φ40mm
Test Flight Time	No Load 26'43"; Full Load 11'37"
Note: The endurance time is based on tests using a 14S 22000mAh battery and is for reference only.	

* The weight parameters may vary by $\pm 100\text{g}$ depending on the actual product configuration and manufacturing tolerances.

Chapter 3 Installation

* Please check all parts before installation.

3.1 Drone Installation


● Drone Frame Installation

* The positions marked M1 and M2 are the front drone, while M3 and M4 are the rear. The sides of the frame with four positioning holes are the top, and the sides with five positioning holes are the bottom.

1、 Take out the drone frame and other parts from the package. Use M4*8 cup head screws(8pcs) to install the four arm clamps on both sides of the frame. The clamps near the front arms should face upward, and those near the rear arms should face downward. (Note: Distinguish between the front, rear, top and bottom of the frame.)



2、 Use M4*8 screws(12pcs) to fix the weighing pads onto the inside of the front crossbeam and the top of the left and right side beams of the drone frame.(Note: Distinguish between the front weighing pad and the side pads.)

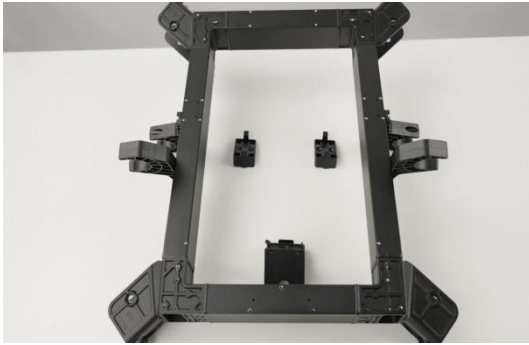


● Installing the 300A Battery Plug

1、 Use M4*9 stepped screws(4pcs) to mount the rear PDB onto the rear crossbeam of the frame. Then seal the screw holes with rubber plugs.



2、 Use M4*8 screws(4pcs) to install two battery rails on the inner sides of the left and right side crossbeams.(Note: Install with the pointed ends facing upward.)

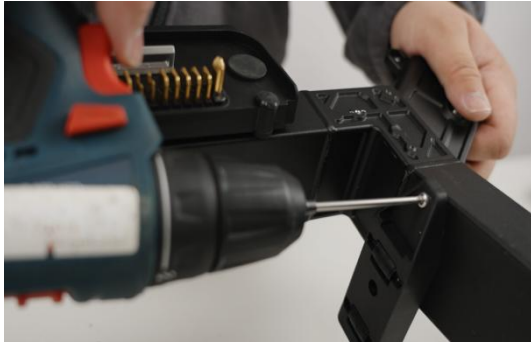

- **Installing the AS150U Battery Plug**

1、.Use M4*9 stepped screws(4pcs) to mount the rear PDB onto the rear crossbeam of the frame, and seal the screw holes with rubber plugs.





2、 Use M4*8 screws(8pcs) to fix the battery compartment onto the back side of the drone frame.




- **Front Cover Installation**

1、 Use M3*8 self-tapping screws(4pcs) to secure the two PDB to each side of the front cover.

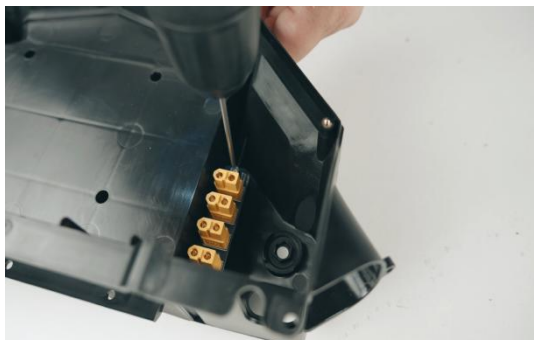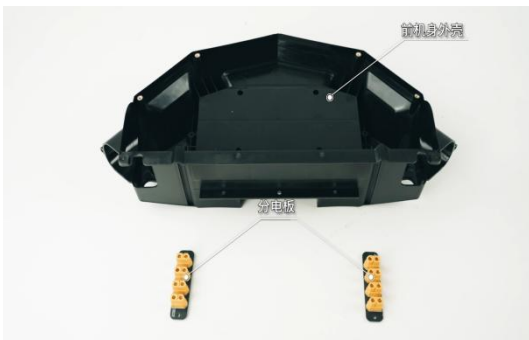

2、 Place the front cover onto the front end of the frame's crossbeam. First, secure both sides of the cover using M4*8 screws. Then fix the GPS bracket onto the top of the front cover and the crossbeam. Finally, tighten the remaining three screws on the bottom side.

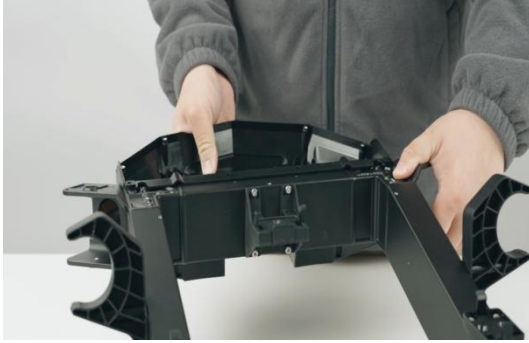

● Rear Cover Installation

1、 Use M4*8 screws to fix the lower rear cover onto the rear end of the frame's crossbeam. (Note: Screws on both the front and back sides must be tightened.)




2、 Use M3*6 self-tapping screws to fix the front obstacle avoidance radar adapter cover and the altitude radar adapter cover to the radar bracket. Then, use M3*8 screws to fix the radar bracket onto the lower rear cover.



● Landing Gear Installation

1、 Use M4*10 screws to install the four landing gear mounting parts onto the bottom of the frame.

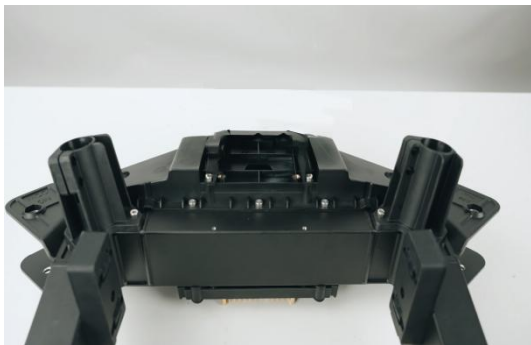

2、Insert the landing gear into the mounting parts, then turn it over onto a flat surface and press until it reaches the limit line. Finally, use M4*8 screws to tighten the landing gear mounting parts. (Note: The landing gear should be higher in the front and lower in the rear.)



2、Install the landing gear adapters along the positioning lines. First, insert one end of the tube into the adapter and use M3*30 screw to tighten one side of the crossbar. Then install the adapter on the other side in the same way. First using M3*30 screw to secure it, and then use M3*10 screws to tighten the remaining screw holes. (Note: Tighten the screws from the outside to the inside.)



- **Arm and Motor System Installation**

1、Insert the M8 nut into the hexagonal slot of the folding part. Insert the locking handle into the arm folding part until the holes are aligned, then fasten from below with M8*65 screws. Repeat the same steps to install the remaining three locking handles.




2、Install the arms into the fixed positions on the folding parts. Insert the M6 self-locking nut into the hexagonal slot of the folding part, then fasten from below with M6*45 screws. Repeat the same steps to install the remaining three arms.




3、 Fix the hexagonal stud onto the short pin, then use M4*8 screw to connect the hexagonal stud with the long pin. Repeat the same steps to connect the remaining three locking handles.




4、 Route the two power cable through both sides of the frame and connect the plugs to the front and rear power distribution boards.

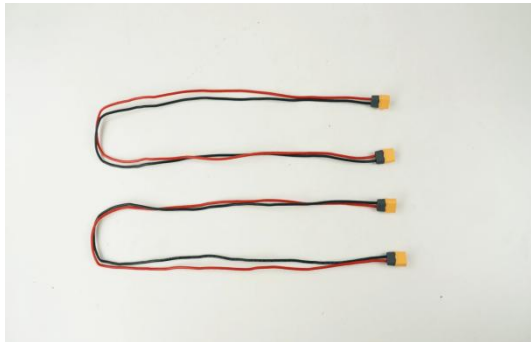

4、Identify the mounting holes and motor positions on the frame. The location of the camera marks the front drone. From left to right, the arms are M1 to M4. Install CCW motors on M1 and M3, and CW motors on M2 and M4.

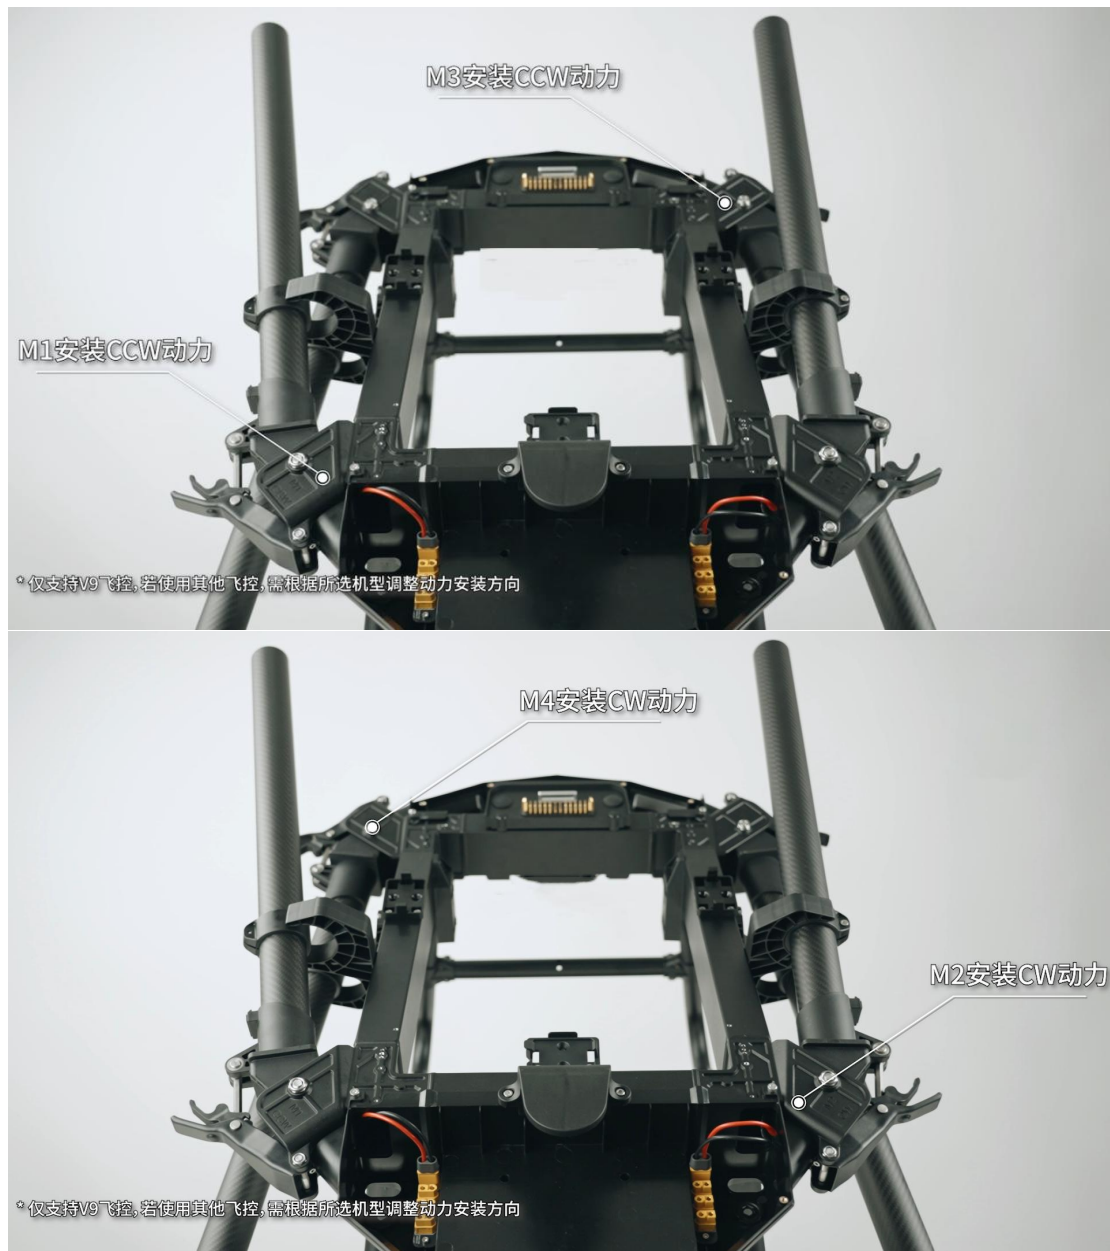

6、Route the power cables for M1 and M2 motors from both sides of the frame to the rear. Route the signal cables for M3 and M4 motors from both sides of the frame to the front.

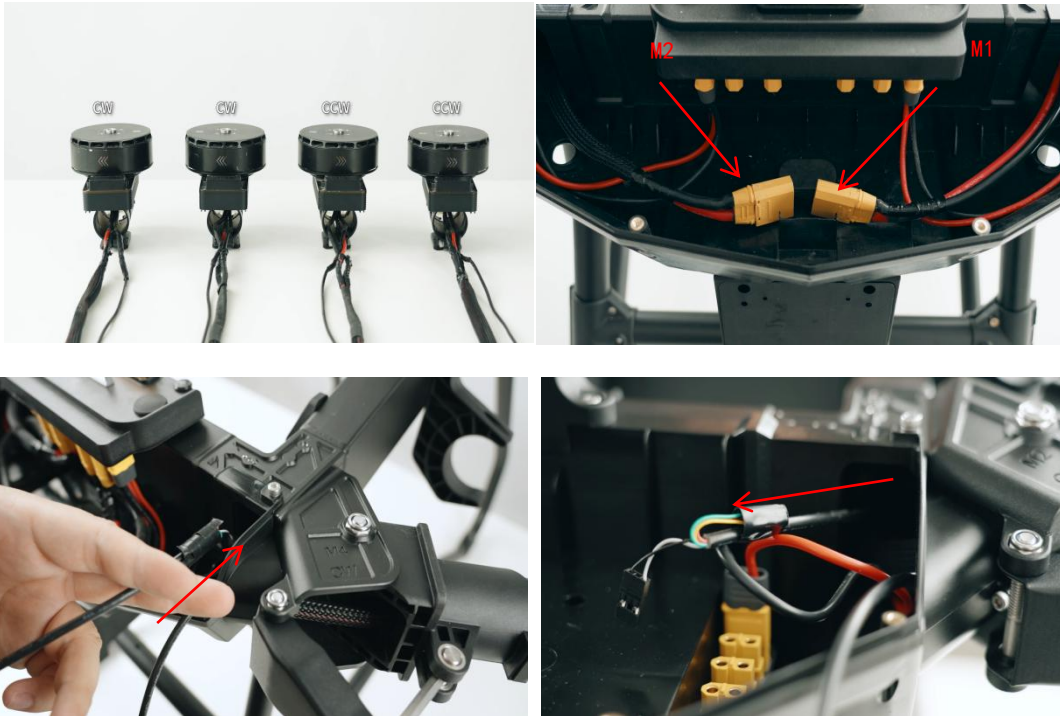

7、Connect the power cables to the rear power distribution board.




- **Radar and Other Components Installation (Optional)**

1、 Remove the front obstacle avoidance radar adapter cover, fix the front radar to the cover, then reattach the cover to the radar bracket.




2、 Mount the altitude radar onto the altitude radar cover.

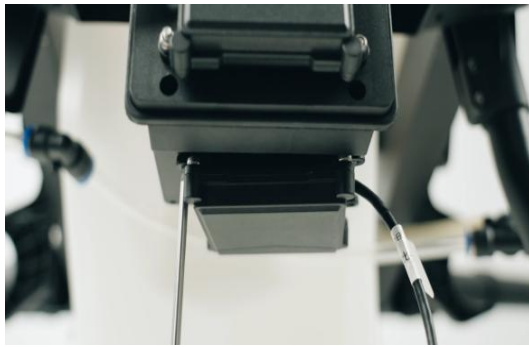

3、 Route the FPV camera cable through the cable hole on the frame, then use screws to fix the camera at the front drone. Route both the radar and camera cables out through the wiring holes on both sides of the lower front cover.



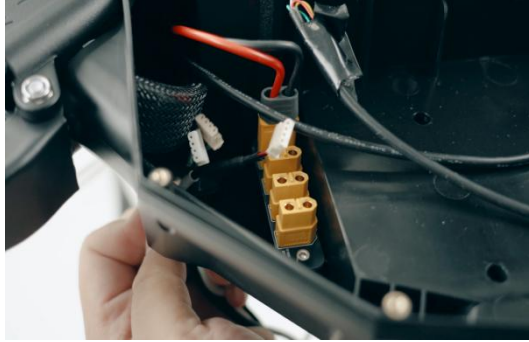

3.2 Spraying System Installation

- Nozzle Installation

1、 Use M3*10 screws to attach the Y-type dual-nozzle spray rod to the nozzle adapter. (Note that the longer rod faces outward and the shorter rod faces inward.)



2、 Secure eight hose clamps onto the drone arms with the buckles facing downward. Fix them using M3*6 self-tapping screws.




- **Pump Installation**

1、 Use M4*8 screws and washers to mount the pump onto the tank. (Ensure the pump head is aligned with the tank's outlet) Then install a 12mm hose clamp on the back of the tank.



2、 Use a heat gun to soften one end of the 12mm hose. Insert the softened end into the tank outlet, and connect the other end to the pump's inlet.

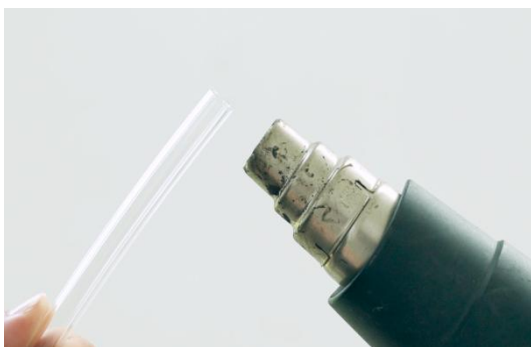

3、 Connect a T-shaped tee to the pump outlet using a 12mm hose.





4、 Attach two 12mm hoses to both sides of the tee, and install a 12mm-to-8mm T-shaped tee at the end of each 12mm hose.



5、 Secure the rear hose of the drone to the hose clamp. Install the weighing module on the weight pad, and place the tank onto the drone frame.




6、 Use 8mm hoses to connect the nozzles. Fix the hoses onto the hose clamps on the arms, and connect the other end to the 12mm-to-8mm T-shaped tee on the tank. Repeat the same method for the remaining arms. Finally, route the pump power cable through the wiring hole at the front drone.

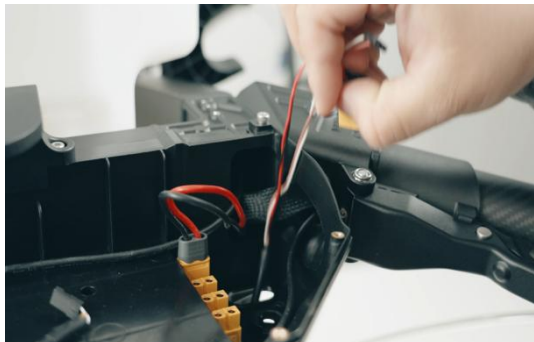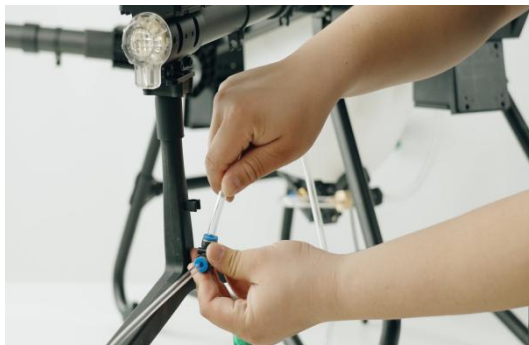

3.3 Control System Installation

- Install the flight controller


1、Use 3M double-sided tape to secure the FMU to the FC bracket. Then use the tape to secure the PMU and the receiver on either side of the FMU.

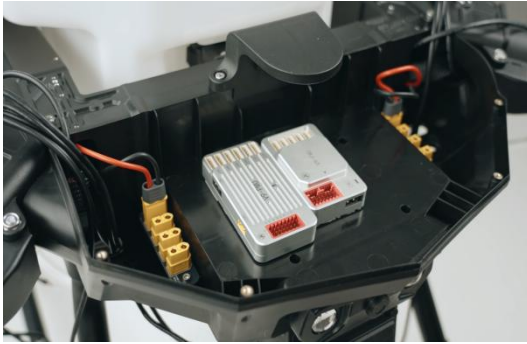


2、Plug the M1–M4 motor signal cables into the corresponding M1–M4 ports on the FMU. Then plug the PMU cable into the PDB after connecting the PMU to the FMU.




2、Connect the SBUS and UART signal cables from the receiver to the corresponding ports on the FMU.

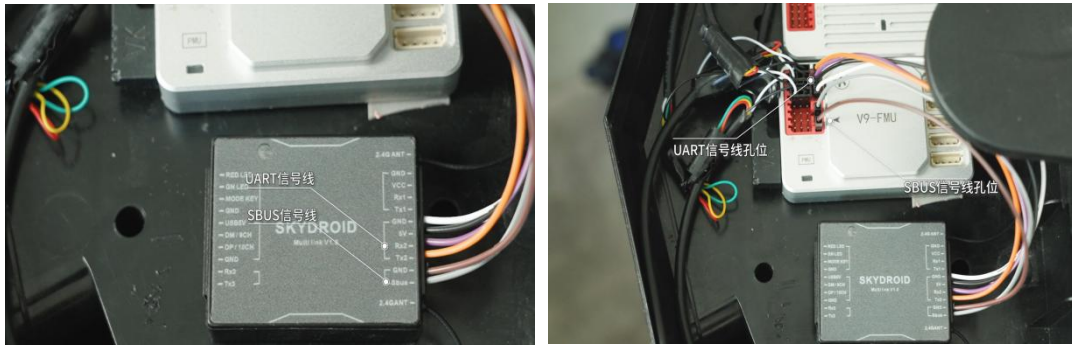


4、Use 3M double-sided tape to secure the GPS to the GPS bracket. Then plug the GPS cable into the GPS port on the FMU.

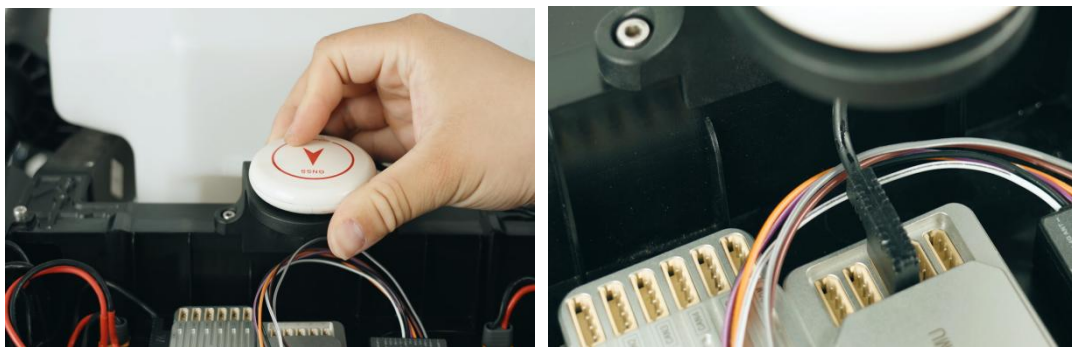


5、Plug the radar signal cables into the CAN1 and CAN2 ports on the PMU, respectively.

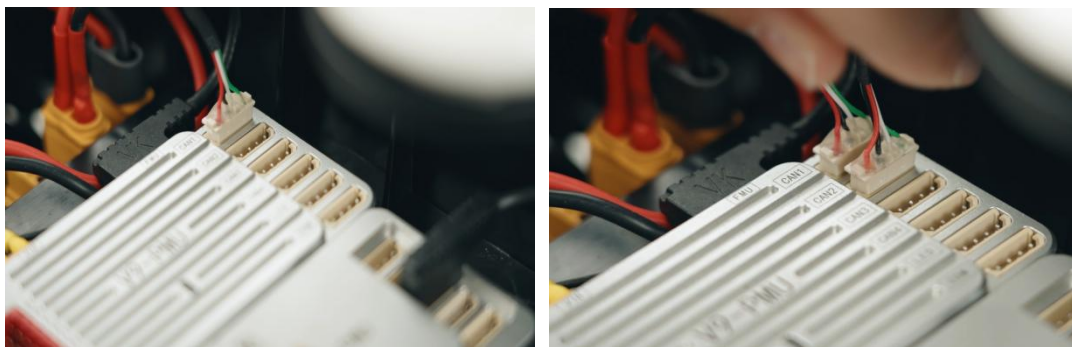

5、Plug the FC indicator light connector into the LED port on the PMU. Then use 3M tape to secure the indicator light onto the light cover at the rear of the drone.

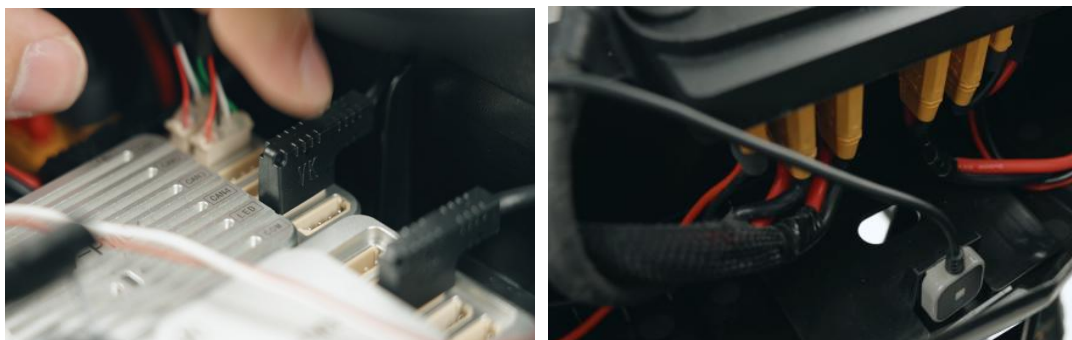

6、 Plug the camera signal cable into the camera transmission port on the receiver.

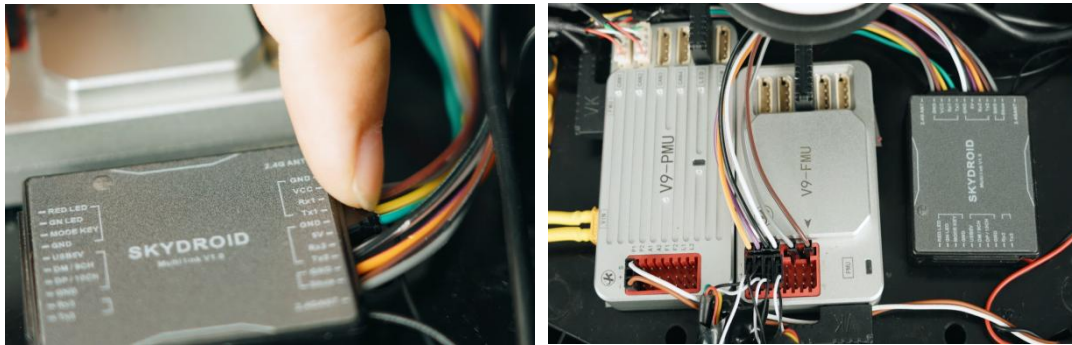


Chapter 4 Drone Debugging

4.1 Drone Debugging





- Link the drone

1、 Power on the drone and the SKYDROID H12 remote controller. Use tweezers to short the receiver's MODE KEY and GND to enter pairing mode, then tap “Link” in the H12 Assistant app until connected.



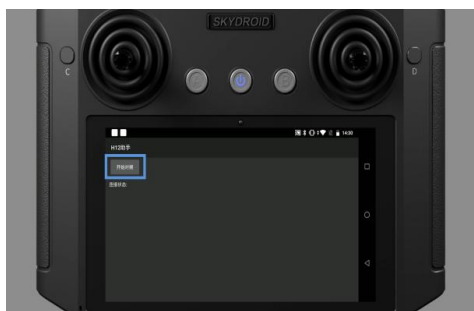

2、Click “ADVANCED”, enter the password, then click “RECEIVER”. Set the Baud Rate to 115200, select SBus as the output, and save the settings.

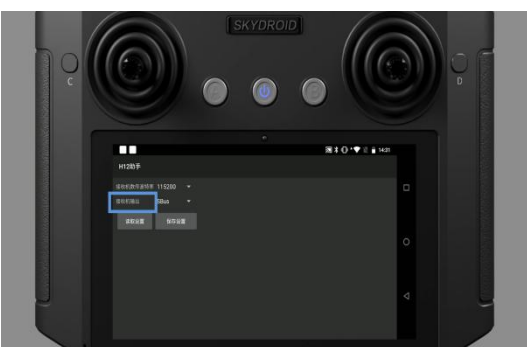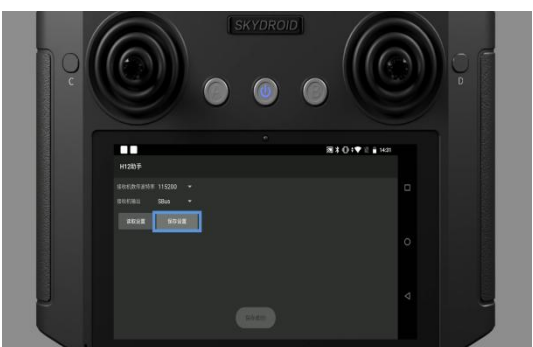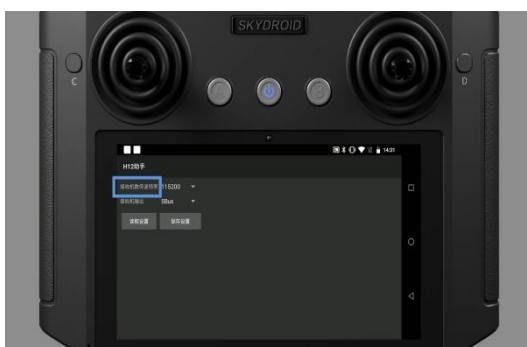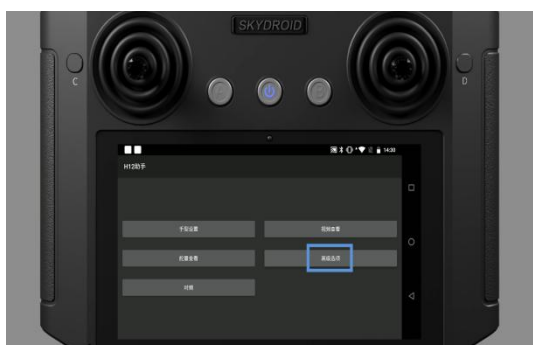

3、Click “PARAM” under “ADVANCED”. Channels 1–5 are default, while channels 6–9 can be customized. Set Channel 6 to F Dial, Channel 7 to Button A, Channel 8 to Button B, and Channel 9 to H Dial, then save.



● Ground Station and Flight Controller Parameter

- 1、打开微克农服 APP，确保遥控器联网后，注册账号，如有账号可直接输入密码登录，即可自动连接飞机。
[Open the VK AGRI app. Ensure the remote controller is connected to the internet. Register a new account, or log in with an existing one to automatically connect to the drone.](#)




2、点击设置，遥控器设置，操作方式可选择为美国手或日本手。Tap **Settings > Remote Controller Settings** , and choose the stick mode: **Left throttle or Right throttle**.



3、点击通道检查，可自行选择通道，这里建议通道 6 选择返航，通道 7 选择水泵开关，通道 9 选择 AB 点。Tap **Channel** to configure switch channels. It is recommended to set Channel 6 for **Home**, Channel 7 for **Pump Switch**, and Channel 9 for **AB Points**.



4、点击右上角-遥控器校准，依次进行上下左右摇杆校准及按键通道校准，确认各摇杆以及按键可正常使用。Tap **Remote Controller Calibration**. Calibrate the sticks (up, down, left, right) and switch channels. Confirm all sticks and buttons function correctly.

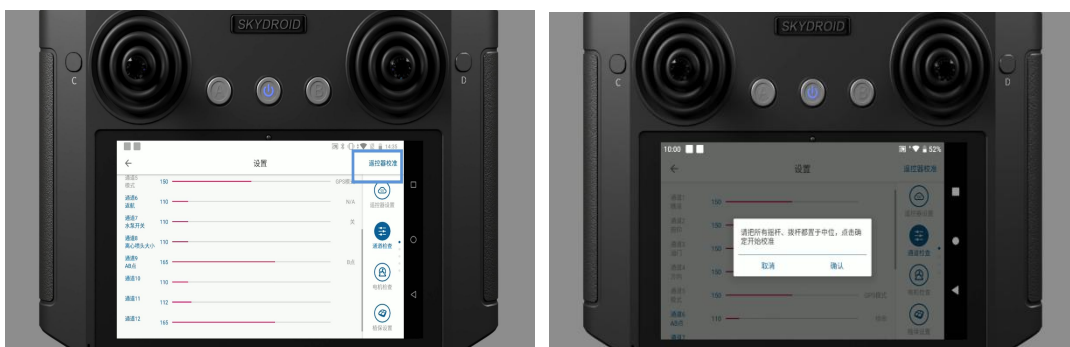



5、点击电机检查，电机检查依次转动 M1 到 M4 四个电机，观察电机顺序及转向是否正确。 **Tap Motor Check. Spin the motors in sequence from M1 to M4. Observe whether the motor order and rotation directions are correct.**




6、点击植保设置，可自定义设置航线宽度、速度、水泵模式、水泵开度 **Tap Spraying Settings to customize parameters such as route width, flight speed, pump mode, and pump opening percentage.**



7、接着点击飞行设置，可对自动起飞高度（建议设置为 4 米）、返航高度（建议设置为 10 米）、一级报警电量（建议设置为 50.4V）、一级保护措施（建议设置为警告）、二级保护电量（建议设置为 49V）、二级保护措施（建议设置为悬停）、手动控制方向（建议设置为开）、手动控制高度（建议设置为可控）、防地雷达灵敏度（建议设置为 10）、最大速度（建议设置为 6m/s）、避障开关（建议设置为悬停）、避障距离（建议设置为 8）、围栏高度（建议设置为 35m）、围栏半径（建议设置为 1100m）、断药保护（建议设置为悬停）、遥控器失效保护（建议设置为悬停）、地面站失效保护（建议设置为悬停）、作业完成动作（建议设置为悬停）、转弯方式（建议设置为 U 形转弯）、机头方向（建议设置为机头锁定）进行自定义设置。

Tap **Flight Settings** to configure: **Auto Takeoff Altitude** (recommended: 4 m), **Return-to-Home Altitude** (recommended: 10 m), **First-Level Battery Warning** (recommended: 50.4V), **First-Level Protection Action** (recommended: Warning), **Second-Level Battery Protection** (recommended: 49V), **Second-Level Protection Action** (recommended: Hover), **Manual Control Direction** (recommended: On), **Manual Control Altitude** (recommended: Controllable), **Terrain-Following Radar Sensitivity** (recommended: 10), **Max Flight Speed** (recommended: 6 m/s), **Obstacle Avoidance Mode** (recommended: Hover), **Obstacle Avoidance Distance** (recommended: 8 m), **Fence Height** (recommended: 35 m), **Fence Radius** (recommended: 1100 m), **Spray Cutoff Protection** (recommended: Hover), **RC Signal Loss Protection** (recommended: Hover), **GCS Signal Loss Protection** (recommended: Hover), **Post-Job Action** (recommended: Hover), **Turning Mode** (recommended: U-turn), **Heading Mode** (recommended: Heading Lock)

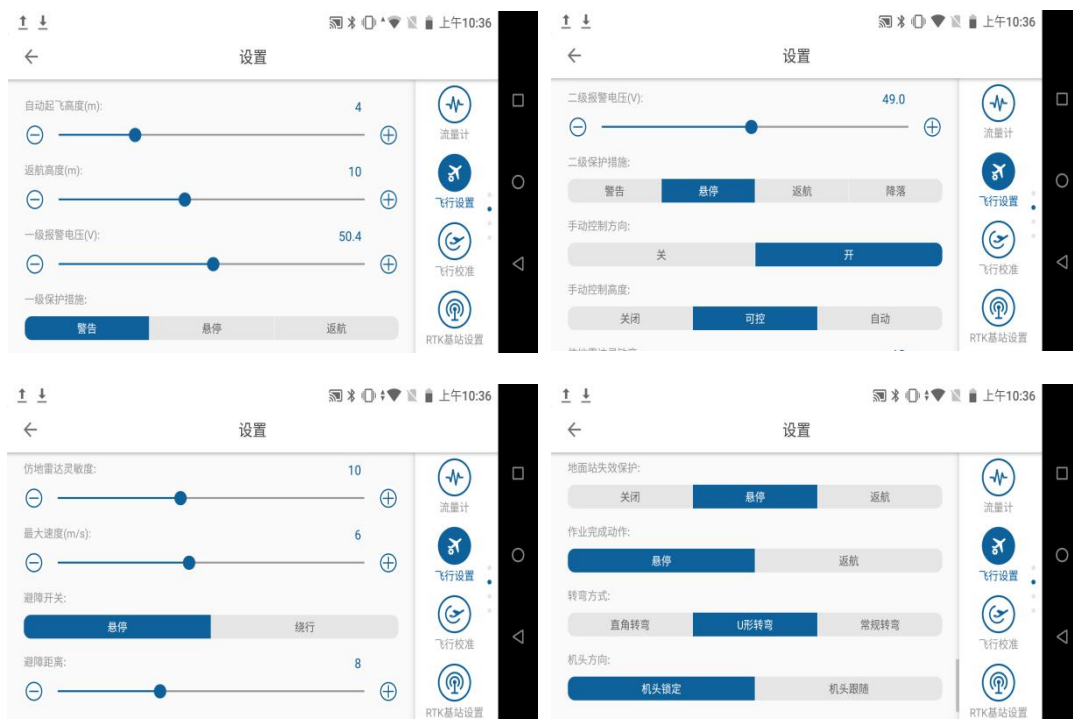

8、点击飞行校准-地磁校准进行磁罗盘校准，根据遥控器语音指示 进行x轴校准将飞机抬起，并旋转至遥控器提示z轴校准，将飞机竖直抬起，继续旋转，遥控器提示罗盘校准完成，放下飞机，断电并再次通电，即完成校准。Tap **Flight Calibration** > **Compass Calibration**. Follow the RC prompts: For X-axis calibration, lift the drone and rotate horizontally. For Z-axis calibration, hold the drone vertically and rotate until calibration is complete. After successful calibration, power off and reboot the drone to finish.



9、点击日志可下载并查看飞行日志，点击版本信息可查看并升级飞控等固件版本、点击调试可查看各项飞行参数。Tap **Logs** to download and view flight logs. Tap **Firmware Info** to check and update firmware versions. Tap **Debug** to view detailed flight parameters.



10、点击作业机类型中，可根据需要选择作业模式为默认，确保水泵、离心喷头最大、最小值为默认值，不建议自行调整。Tap **Aircraft Type**, and choose the default operation mode. Ensure the pump and

centrifugal nozzle min/max values remain at default. Manual adjustment is not recommended.



11、点击高级设置，可对机型设置、算法参数、安装设置、感度设置以及飞行校准进行更深度的设置，以下为你推荐，仅供参考若飞机不稳定或出现异常，可联系官方平台，获得更精准的调试方法。Tap **Advanced Settings** for in-depth configuration, including **Aircraft Type**, **Algorithm Parameters**, **Installation Settings**, **Sensitivity Settings**, and **Flight Calibration**. The following recommended sensitivity settings are for reference. If instability or anomalies occur, contact the official support for guidance.


(1) 机型设置：G18 机型确认设置为四轴 X 字； **Aircraft Type**: Set G18 to X-type quadcopter.



(2) 算法参数：噪声抑制级别选择为 2、电机怠速选择为中速、起飞油门设置为 1200、定位增强设置为开、前后避障雷达灵敏度设置为 35、仿地雷达灵敏度设置为 50、刹车系数设置为 15; **Algorithm Parameters**: **Noise Suppression Level**: 2, **Motor Idle Mode**: Medium, **Takeoff Throttle**: 1200, **Positioning Enhancement**: On, **Front/Rear Obstacle Radar Sensitivity**: 35, **Terrain-Following Radar Sensitivity**: 50, **Brake Coefficient**: 15



(3) 安装位置：飞控安装方式选择为前，RTK 安装方式选择为左右，RTK、GPS、IMU 安装偏差 XYZ 均设置为 0；**Installation Settings:Flight Controller Installation: Front,RTK Installation: Left & Right,RTK/GPS/IMU Offset XYZ: All set to 0;**

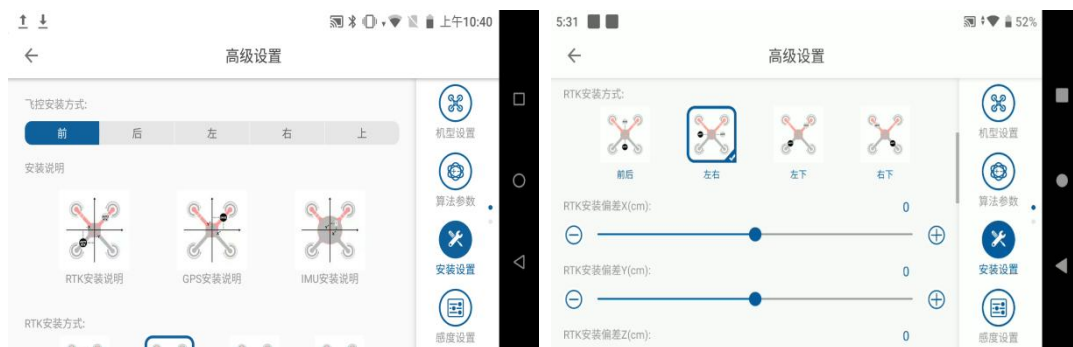


(4) 感度设置：R/P 基础感度设置为 135、Y 基础感度设置为 470、R/P/Y 姿态感度设置为 510、R/P 阻尼设置为 8、Y 阻尼设置为 0、高度系数设置为 13、垂直速度系数设置为 300、水平阻尼设置为 15、水平速度系数设置为 140；**Sensitivity Settings:R/P Base Sensitivity: 135,Yaw Base Sensitivity: 470,R/P/Y Attitude Sensitivity: 510,R/P Damping: 8,Yaw Damping: 0,Altitude Coefficient: 13,Vertical Speed Coefficient: 300,Horizontal Damping: 15,Horizontal Speed Coefficient: 140;**



4.2 Flight Test

1、Use M3*10 screws (4 pcs) and M4*8 screws (2 pcs) to secure the front upper cover. Then calibrate the motors and install the propellers (make sure the motor and propeller rotation directions match).

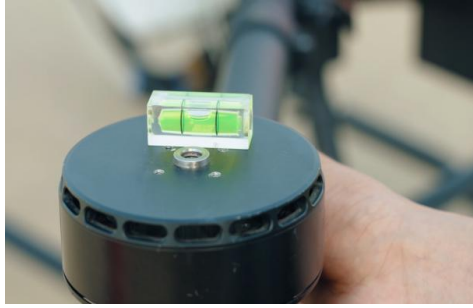

2、In spray mode, tap Button A to turn on the pump, and check whether the pump and nozzles are functioning properly.



3、Then unlock the drone by pushing the sticks inward or outward and holding them for a few seconds. If it fails, try again. Move the throttle stick to take off.



Thank you for reading this document. If you have any questions or suggestions, please contact our official after-sales service.

Tel: 0551-62579736

Email: infor@effort-tech.com

Please stay tuned for more technical support.:



微信公众号



官网



B站



抖音号

Updates to this guide will not be notified separately, so please continue to follow our official website
www.effort-tech.com